




ProAction Thrust™ Floor System

SYSTEM TYPE: FLOATING RESILIENT

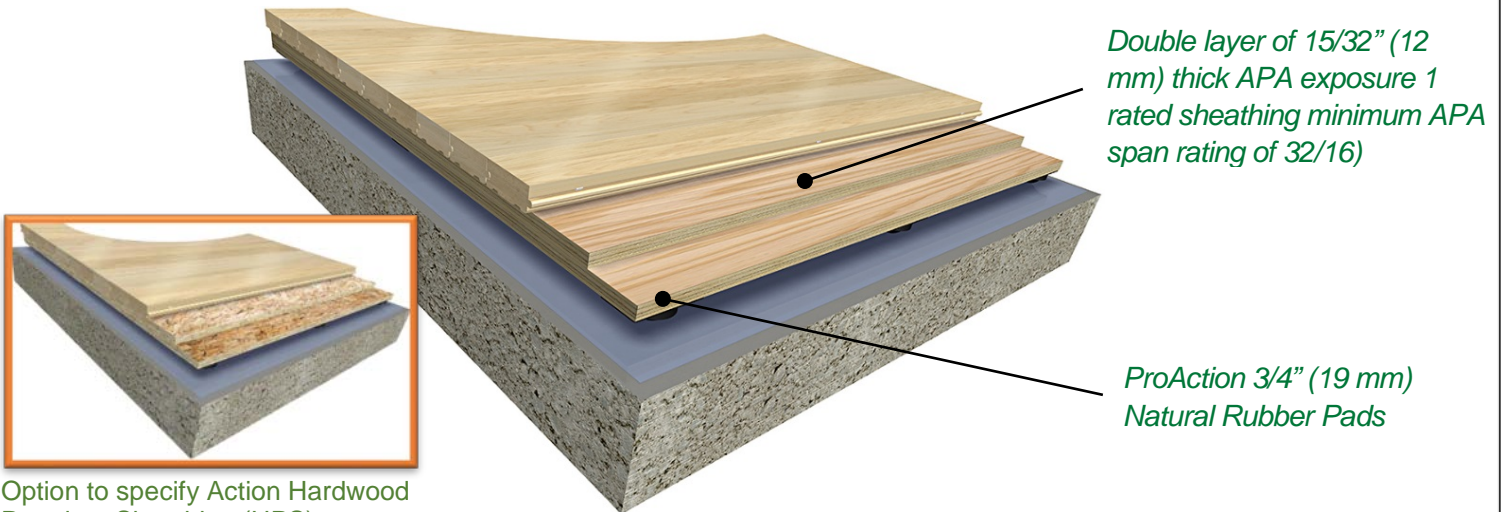

MFMA NORTHERN HARD MAPLE BY ACTION:

Random Length (RL).
Action Long Length (FJ)
Expansion Ridge Technology (ERT)

TESTING AGENCY:

Certified by ISSS

PERFORMANCE MEETS OR EXCEEDS:

MFMA PUR Compliant
DIN 18032 Part 2
FIBA Level 1
EN 14904

SLAB DEPRESSION:

25/32" (20 mm): 2-1/2" (64 mm)
33/32" (27 mm): 2-3/4" (70 mm)

LEED:




FloorScore®-certified
Proprietary certified EPD®
FSC®-certified Maple and Subfloor available
MR credits – based on products, selected materials and facility locations

PERFORMANCE AND SYSTEM STABILITY:

- Variable load response ProAction pads
- Excellent ball bounce
- SCORES Compliant
- Stable double layer subfloor system
- Excellent shock absorption

- ProAction Thrust is well suited to applications where high performance is important and FIBA certification is desired.
- Features the proven, durable double layer 15/32" (12 mm) subfloor design.
- The manufacturer and flooring shall be independently verified by the guidelines of the ISO 14040:2006 and ISO 14044:2006 Life Cycle Assessment (LSA) confirming a negative carbon footprint.
- Carbon Evaluation must be inclusive and based on all corporate facilities, offices and mills.
- The manufacturer and flooring shall be independently verified by the guidelines of the ISO 14064-1:2006 World Resources Institute Greenhouse Gas Protocol, Scope 1, 2 and 3.
- The manufacturer and flooring shall be registered in the Collaborative for High Performance Schools (CHPS) Product Database.
- Floor system manufacturer must provide a Life Cycle Assessment and an Environmental Product Declaration (EPD®) in accordance with the Product Category Rule Version 2.2014.
- Floor system manufacturer must be FloorScore® Certified in accordance with CDPH 01350.

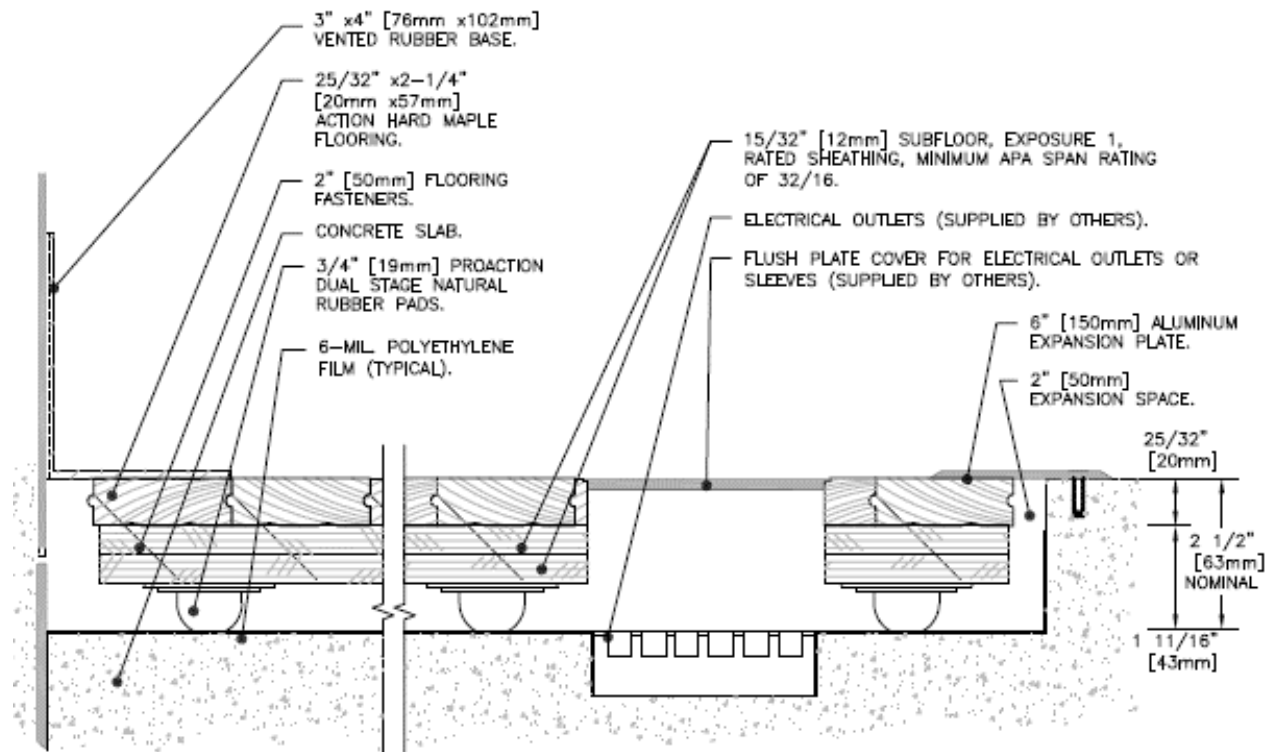

Complete product specifications and system drawings are available online at: www.actionfloors.com



ACTION FLOOR SYSTEMS, LLC
 4781 N. US Hwy 51 • Mercer, WI 54547
 TOLL FREE: 800-746-3512 • VOICE: 715-476-3512
 FAX: 715-476-3585 • EMAIL: info@actionfloors.com
actionfloors.com