

**VSPORT 350** is a hybrid PVC surface, ideal for both sports and multifunctional use. Designed to be durable and easy to maintain, it also has the advantage of an added layer of comfort for its users.

Its closed cell high density foam underlay provides comfort and safety while its antibacterial treatment makes **VSPORT 350** a great option for installations that require a clean and sanitized environment. Installation of VSPORT products requires less glue than its competitors and makes it a better choice for the planet.


VSPORT 350 is easy to maintain with a reduced number of joints, requires no waxing and is factory treated to resist mold and bacteria.

# VSPORT 350

## THE 350 PRODUCT LINE BY VSPORT

Meets North American sports flooring standards

- ✓ 15-year manufacturers wear layer warranty
- ✓ Factory treated coating for a better protection against scratches and sole marks
- ✓ ASTM F2772 (Class 1)\*compliant  
\* Refer to the different classes of ASTM F2772
- ✓ Superior joints and ligaments injury prevention
- ✓ Customizable with unique design
- ✓ Easy maintenance, durable and no wax required

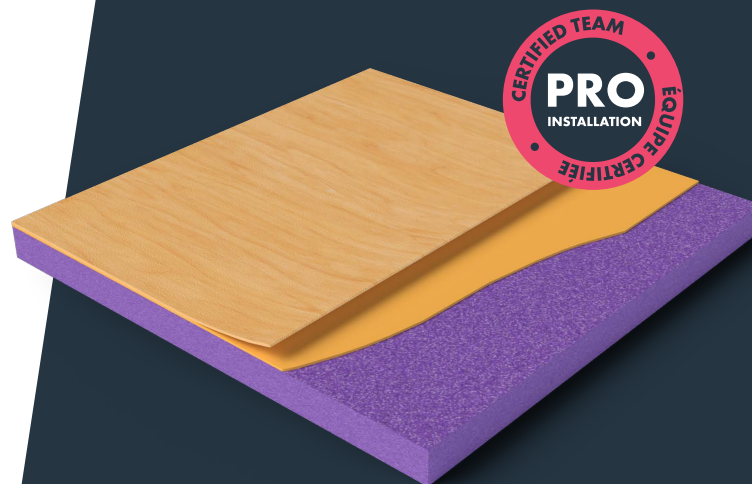

## THE COLORS






# VSPORT 350

## THE COMPOSITION

From the adhesion of the underlay to the resistance of the polyurethane wear coating, all 6 layers of **VSPORT 350** have their own impact on the quality of the final product.

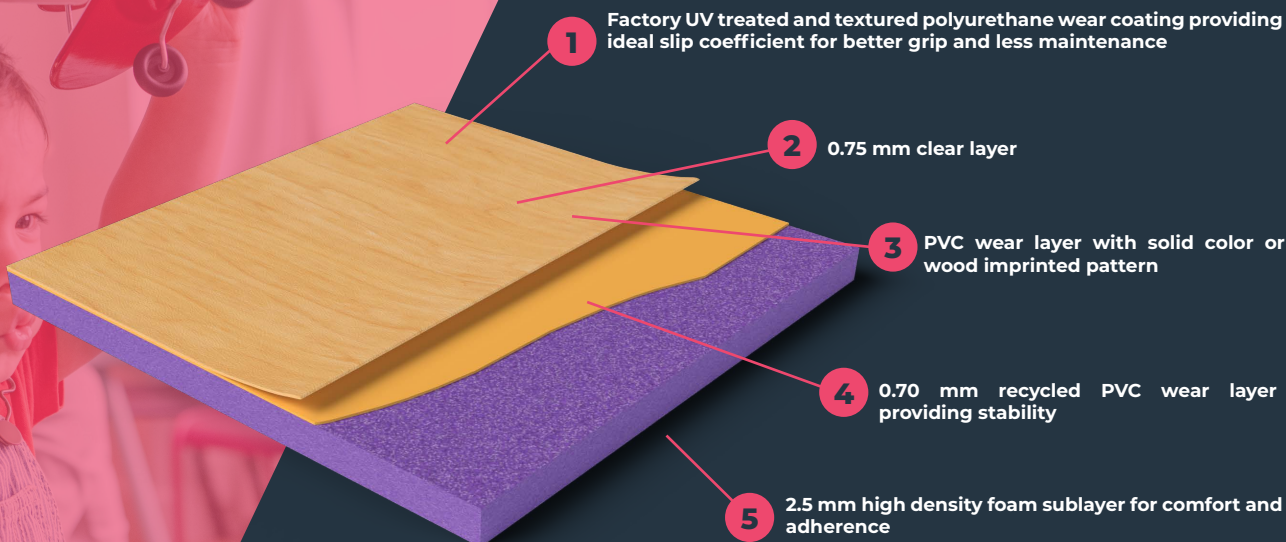

DESCRIPTION	SPECIFICATIONS	STANDARDS
<b>PRODUCT DESCRIPTION</b>		
Wear layer	100% PVC PUR polyurethane	...
Total thickness	3.5 mm	...
Wear layer thickness	1.5 mm	...
Roll width	1.5 m (wood) / 2 m (solid color)	...
Roll length	20 m	...
<b>TECHNICAL CHARACTERISTICS</b>		
Sports properties	Class 1	ASTM F2772
Shock absorption	> 10% - < 22%	ASTM F2772
Vertical deformation	Max 3.5 mm	ASTM F2772
Sliding effect	80 - 110	ASTM F2772
Ball rebound	More than 90%	ASTM F2772
<b>SUSTAINABILITY / HEALTH SAFETY</b>		
Chemical product resistance	Excellent	ASTM D543
Static Load (175 psi)	< 0.08 mm	ASTM F970
Static Load (250 psi)	< 0.05 mm	...
Resistance to rolling load	Less than 1500N	EN 1569
Fire rating	Class 1	ASTM E648
Antibacterial protection	Yes	...
Antifungal protection	Yes	...