

**VSPORT 710** is a versatile and performant sports surface. Through its unique design, it offers premium sports characteristics in terms of shock absorption as well as optimum slip coefficient and ball rebound.

Ideal for a wide variety of sports practiced in a gymnasium such as volleyball, basketball, badminton, futsal and handball, the 7.10 mm thick PVC cushioned sports surface combines comfort and performance in addition to reaching the highest industry standards. Although designed primarily for sports activities, **VSPORT 710** is suitable for multiple uses.


Its surface is easy to maintain with a reduced number of joints, requires no waxing and is factory treated to resist mold and bacteria.

# VSPORT 710

## THE 710 PRODUCT LINE BY VSPORT

Meets North American sports flooring standards

- ✓ 15-year manufacturers wear layer warranty
- ✓ Factory treated coating for a better protection against scratches and sole marks
- ✓ ASTM F2772 (Class 2)\*compliant  
\* Refer to the different classes of ASTM F2772
- ✓ Superior joints and ligaments injury prevention
- ✓ Customizable with unique design
- ✓ Easy maintenance, durable and no wax required

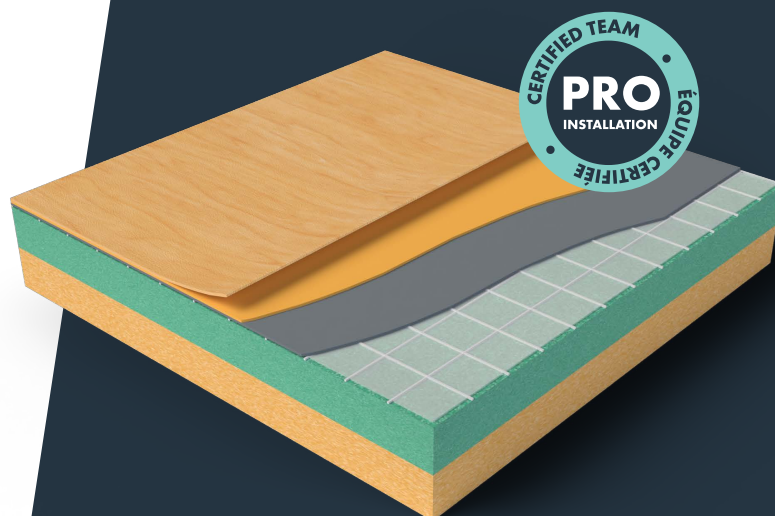

## THE COLORS






# VSPORT 710

## THE COMPOSITION

From the adhesion of the underlay to the resistance of the polyurethane wear coating, all 7 layers of **VSPORT 710** have their own impact on the quality of the final product.

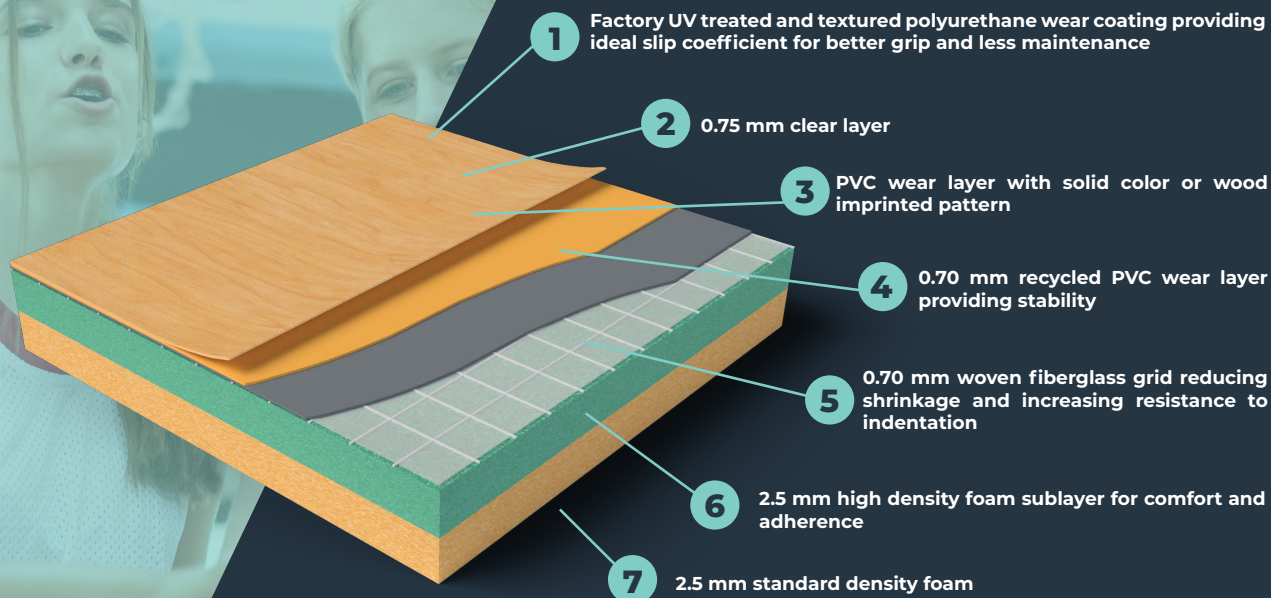

| DESCRIPTION                           | SPECIFICATIONS                     | STANDARDS  |
|---------------------------------------|------------------------------------|------------|
| <b>PRODUCT DESCRIPTION</b>            |                                    |            |
| Wear layer                            | 100% PVC PUR polyurethane          | ...        |
| Total thickness                       | 7.1 mm                             | ...        |
| Wear layer thickness                  | 2.1 mm                             | ...        |
| Roll width                            | 1.5 m (wood) / 2 m (solid color)   | ...        |
| Roll length                           | 26.5 m (wood) / 20 m (solid color) | ...        |
| <b>TECHNICAL CHARACTERISTICS</b>      |                                    |            |
| Sports properties                     | Class 2                            | ASTM F2772 |
| Shock absorption                      | > 22% - < 34%                      | ASTM F2772 |
| Vertical deformation                  | Less than 2 mm                     | ASTM F2772 |
| Sliding effect                        | 80 - 110                           | ASTM F2772 |
| Ball rebound                          | Greater than 96%                   | ASTM F2772 |
| <b>SUSTAINABILITY / HEALTH SAFETY</b> |                                    |            |
| Chemical product resistance           | Excellent                          | ASTM D543  |
| Static Load (175 psi)                 | < 0.2 mm                           | ASTM F970  |
| Static Load (250 psi)                 | < 0.7 mm                           | ...        |
| Resistance to rolling load            | Less than 1500N                    | EN 1569    |
| Fire rating                           | Class 1                            | ASTM E648  |
| Antibacterial protection              | Yes                                | ...        |
| Antifungal protection                 | Yes                                | ...        |