

AacerFlex™ VLP

FLOATING SYSTEM




AacerFlex VLP offers a low-profile option of our AacerFlex sports floor system. Like the original AacerFlex floor, VLP also provides subfloor panel construction and resilient component choices. A good choice when meeting minimal height requirements while furnishing desired shock absorbing and ball rebound characteristics.






- 1. Precision-milled Acer Maple
- 2. 3/4" (19mm) AcerFlex™ VLP Panel
- 3. 1/4" (6mm) Performance Foam

WALLBASE

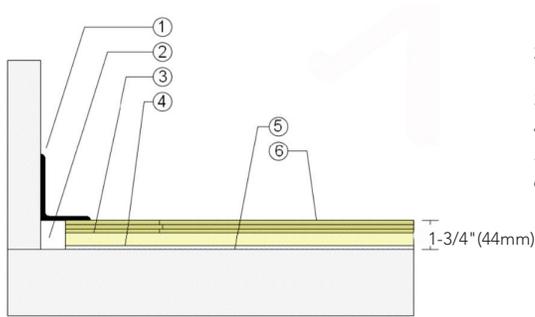


- 1. 3" x 4" (76mm x 101mm) Vent Cove Base
- 2. 1-1/2" (38mm) Min. Expansion Space
- 3. AcerFlex VLP Subfloor Panels
- 4. Resilient Foam Blanket
- 5. Vapor Retarder
- 6. 25/32" (20mm) MFMA Maple Flooring

THRESHOLD

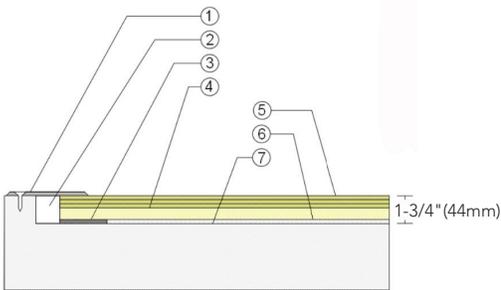

- 1. 1/4" (6mm) Aluminum Threshold
- 2. 1-1/2" (38mm) Min. Expansion Space
- 3. Solid Blocking at Doorway
- 4. AcerFlex VLP Subfloor Panels
- 5. 25/32" (20mm) MFMA Maple Flooring
- 6. Resilient Foam Blanket
- 7. Vapor Retarder

EQUIPMENT

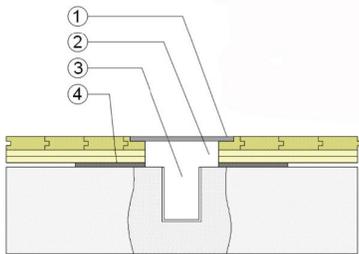

- 1. Floor Plate
- 2. 1-1/2" (38mm) Min. Expansion Space at all Inserts & Electrical Penetrations
- 3. Concrete Floor Penetration
- 4. Solid Blocking at Insert

Green Status and LEED Contributors



- FSC® Certified Maple - MR
- FSC® Certified Subfloor Components - MR
- Environmental Quality - EQ
- Regional Materials - MR

Resilience

1/4" (6mm) Performance Foam
*Other pad options available

Slab Depression

1/4" (6mm) Performance Foam
• 25/32" (20mm) Flooring - 1-3/4" (44mm)

Optional AcerFlex™ Systems

AcerFlex™
AcerFlex™ TP

Subfloor Construction

Plywood

System Type

Floating

Testing Laboratory Partners



It is the policy of Acer Sports Flooring to continuously improve its line of products. Therefore, Acer Sports Flooring reserves the right to change, modify or discontinue systems, specifications and accessories of all products at any time without notice or obligation to purchaser.