



## THE ULTIMATE SPORTS FLOOR

Dynapoint is the ultimate polyurethane gym floor system. Designed for indoor use as a non-porous system, the specially formulated products create a high performance, seamless surface, ideal for all gymnasium floor surfaces.

When applied on top of a granular rubber substrate, the elastic Dynapoint floor coatings provide a premium resilient surface for the utmost in player comfort, safety and performance. Dynapoint offers excellent durability and scuff resistance.


## TOP COAT COLOURS




## DYNAPOINT FEATURES:

- ❖ Ideal Multipurpose Surface for School and college Use
- ❖ Accepts Heavy Loads
- ❖ Available in Various Thicknesses from 5mm to 13mm
- ❖ Environmentally Friendly and Fully DIN/ASTM Tested
- ❖ Excellent Ball Bounce, Ball Roll and Force Reduction
- ❖ Seamless Surface for Low Maintenance

## LINE COLOURS

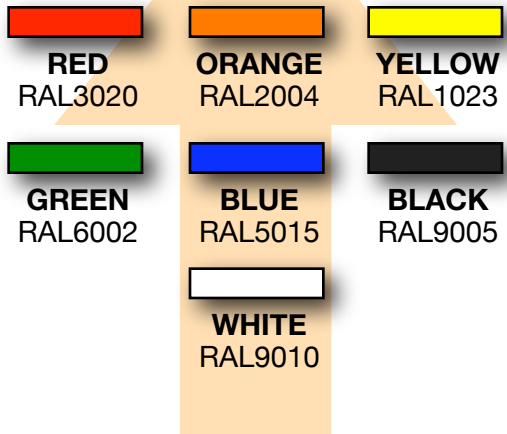

FORCE REDUCTION	35%	DIN 18032	9+2
	25%	DIN 18032	7+2
	53%	DIN 18032	14+3
FRICTION (DRY)	0.45		
BALLBOUNCE	99%	DIN 18032	(ALL SYSTEMS)
HARDNESS	81	SHORE A	
GLOSS	3-6%		
RESIDUAL IMPRESSION	0.4MM	DIN 18032	
IMPACT RESISTANCE	18 NM	DIN 18032	
MAXIMUM STATIC LOAD	18 KG/CM2		
FLAMMABILITY	CLASS 1		
TENSILE STRENGTH (TOP)	10 N/MM2		
TEAR-STRENGTH (GRAVES)	25 N/MM		
ELONGATION AT BREAK(TOP)	156%		
COLOUR FASTNESS	8	EXCELLENT	
ABRASION RESISTANCE	0.08	mm LOSS TABER	
ADHESIVE TYPE	2 COMPONENT POLYURETHANE		
SELFLEVELLING LAYER TYPE	MERCURY/ CADMIUM FREE 2 COMPONENT POLYURETHANE		

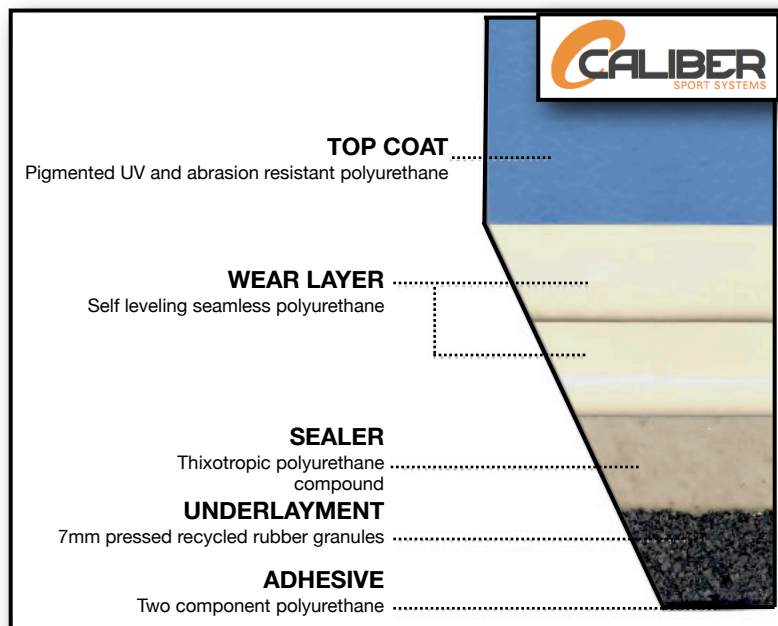

### LEED CREDIT DATA

**CONTACT US FOR SPECIFIC  
CALCULATIONS ON QUALIFYING FOR  
ANY OF THE FOLLOWING LEED  
CREDITS:**

- **POST CONSUMER RECYCLABLE MATERIAL**
- **LOW/NO VOC CONTENT ON ALL COMPONENTS**
- **RAPID RENEWABLE CONTENT IN ALL POLYURETHANES**
- **POST MANUFACTURER RECYCLABLES IN POLYURETHANES**
- **LOCALLY MANUFACTURED MATERIALS (PRODUCTS VARY BY LOCATION)**